


These fittings are available through 1" (33.7mm O.D) up to 12" (323.9mm O.D). Use the Fitting Size Table convert nominal pipe size to corresponding pipe O.D. These fittings are designed to provide minimum pressure drop and uniform strength.

Gr8LOK by GruvLOK Fig 8060 Standard Tee

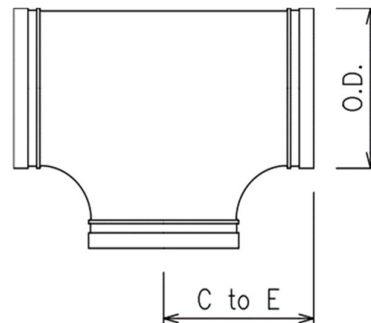

Nominal Size (mm)	Pipe O.D. (mm)	Max Working Pressure Bar / PSI	Centre to End (C to E) (mm)
25mm	33.7mm	34.4 Bar 500 PSI	57mm
32mm	42.4mm	34.4 Bar 500 PSI	70mm
40mm	48.3mm	34.4 Bar 500 PSI	70mm
50mm	60.3mm	34.4 Bar 500 PSI	82.5mm
65mm	76.1mm	34.4 Bar 500 PSI	95mm
80mm	88.9mm	34.4 Bar 500 PSI	108mm
100mm	114.3mm	34.4 Bar 500 PSI	127mm
150mm	165.1mm	34.4 Bar 500 PSI	165mm
200mm	219.1mm	34.4 Bar 500 PSI	197mm
250mm	273.0mm	34.4 Bar 500 PSI	229mm
300mm	323.9mm	34.4 Bar 500 PSI	254mm

Cast Fittings: Ductile Iron Conforming to ASTM A-536

Max Working Pressure: 34.4 Bar / 500 PSI

Finish: Standard Red Colour Rust Inhibiting Paint. Optional Hot Dipped Zinc Galvanized conforming to ASTM A-153

Approvals:

LPCB Approved 1" (33.7mm O.D) up to 8" (219.1mm O.D).

FM Approved 1" (33.7mm O.D) up to 12" (323.9mm O.D).

UL Listed. VdS Approved.

* All Product specifications and other information shown were current as of document issue / revision date and are subject to change without notice.
Doc Ref: FMGR8/8060 Date: 21/01/2021 Revision: 1