
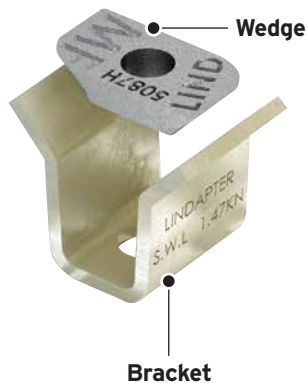
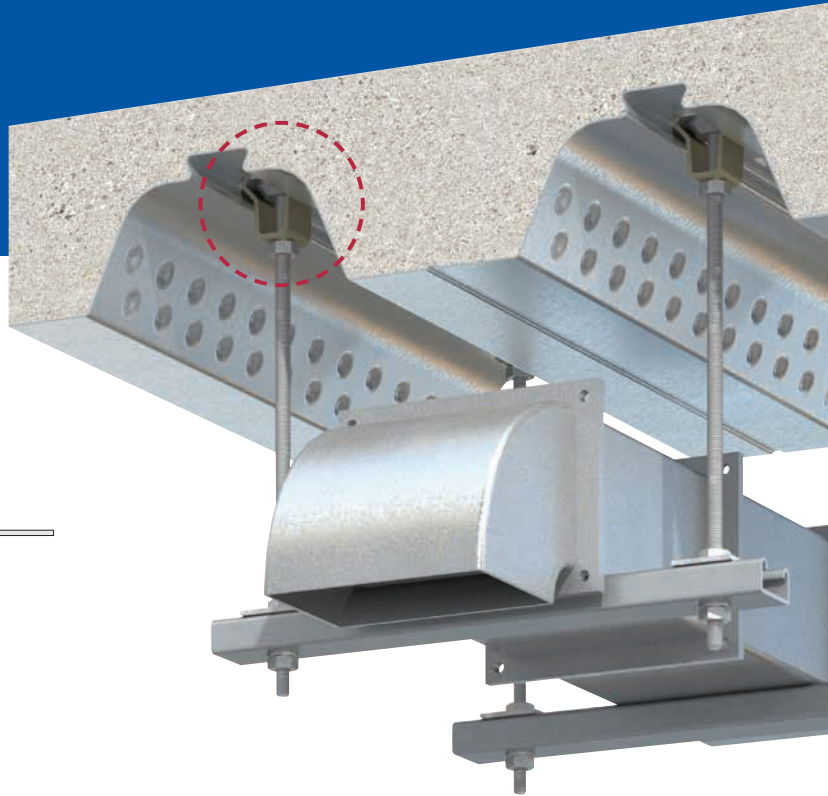



Type MF

Specifically developed for use with MetFloor® 60 and MetFloor® 80 profiles manufactured by Construction Metal Forming (CMF®).



For Characteristic Resistances when designing a connection to Eurocode 3, refer to DoP No.017 (CE) or DoC No.117 (UKCA) on Lindapter's website. Alternatively, request a DoP or DoC brochure.

Bracket: Steel strip, zinc plated + JS500. **Wedge:** Malleable iron, zinc plated.

Product Code	Rod min 4.6	Safe Working Load (FOS 3:1)	
		Tensile / 1 Rod kN	Tightening Torque Nm
MF06*	M6	1.47	10
MF08*	M8	1.47	10
MF10*	M10	1.47	10

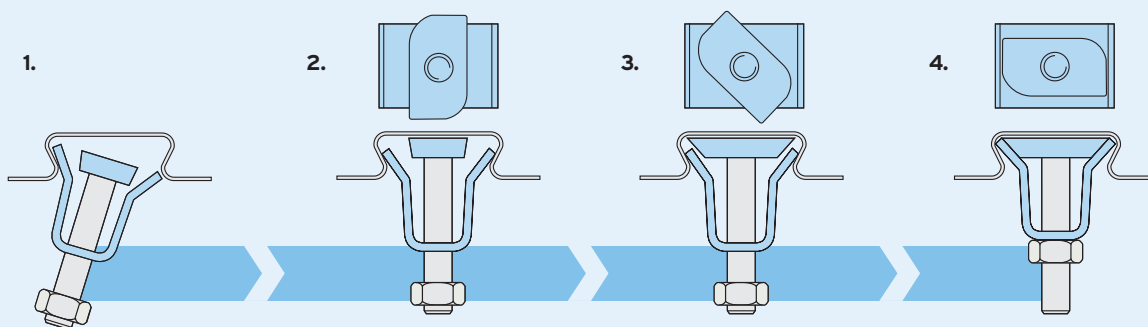
* Oversized washer supplied with MF06 and MF08. A washer is optional for MF10.

➤ Independently fire tested in accordance with BS EN 1991-1-2. For fire ratings please refer to www.Lindapter.com



How to install...

▶ Watch the installation video at www.Lindapter.com



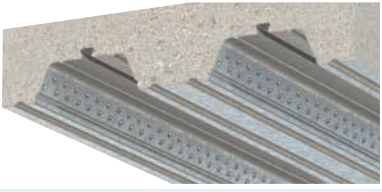


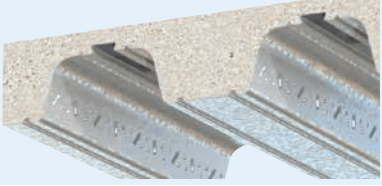



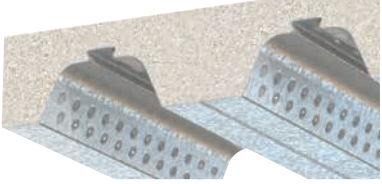


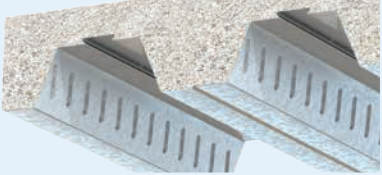


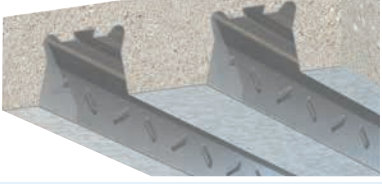


- 1) Pre-assemble the bracket and wedge (flat surface facing up) onto the threaded rod and insert one side of the bracket into the re-entrant channel of decking.
- 2) Insert the other side of the bracket into position inside the decking.
- 3) Turn the wedge clockwise until the position in Fig. 4 has been achieved.
- 4) Tighten the nut on the rod to a torque of 10Nm (prevent rod from rotating).

- Install the decking fixings after the concrete has been poured and has reached full strength.
- If the decking profile is deformed or distorted, do not install the fixing. If in doubt, contact the Technical Support team for advice.
- Although the Type MF is similar in appearance to Type MW2 (p. 73), it should NOT be used in profiles manufactured by Kingspan®.

Compatible Profiles

Lindapter has developed an extensive range of CE Marked decking fixings to ensure optimum compatibility with all major decking profiles.

Lindapter Decking Fixing	Compatible Composite Decking Profile(s)
Type COM page 70  	Tata Steel ComFlor® 60, 80 and 95   Opening: 15mm (+/-1mm) 
Type TR60 page 71  	SMD® TR60+™ and TR80+™   
Type MF page 72  	CMF® MetFloor® 60 and MetFloor® 80   
Type MW2 Multiwedge 2 page 73  	Kingspan® Multideck MD60 and MD80   
Type AW Alphawedge page 74  	Richard Lees Decking Ribdeck E60   
Type AMD page 75 	AMDECK® AMDECK® 60 and AMDECK® 80   
Type SM page 76  	Sigmat SigDeck 100   
Type VN page 77  	Fits several profiles including: AMDECK® 54, R51+™, ComFlor® 51+, Holorib, Superib, Multideck MD50 and MetFloor® 55. 