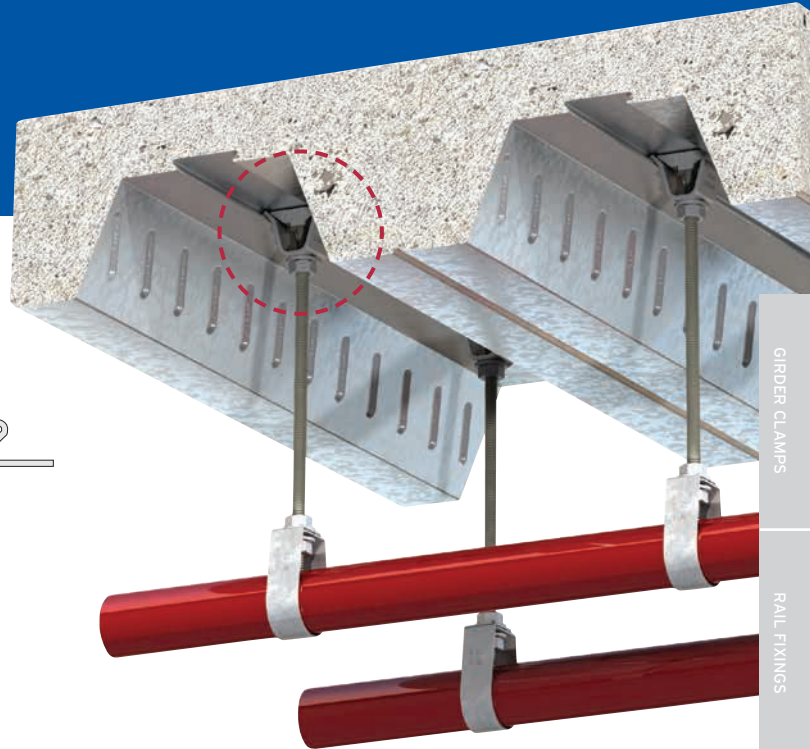



Type MW2 - Multiwedge 2

Designed for the Multideck MD60 and Multideck MD80 profiles manufactured by Kingspan®.



For Characteristic Resistances when designing a connection to Eurocode 3, refer to DoP No.019 (CE) or DoC No.119 (UKCA) on Lindapter's website. Alternatively, request a DoP or DoC brochure.



Bracket: Pre-galvanised strip. **Wedge:** Malleable iron, zinc plated.

Product Code	Rod min 4.6	Safe Working Load (FOS 3:1)	
		Tensile / 1 Rod kN	Tightening Torque Nm
MW06*	M6	1.47	10
MW08*	M8	1.47	10
MW10*	M10	1.47	10

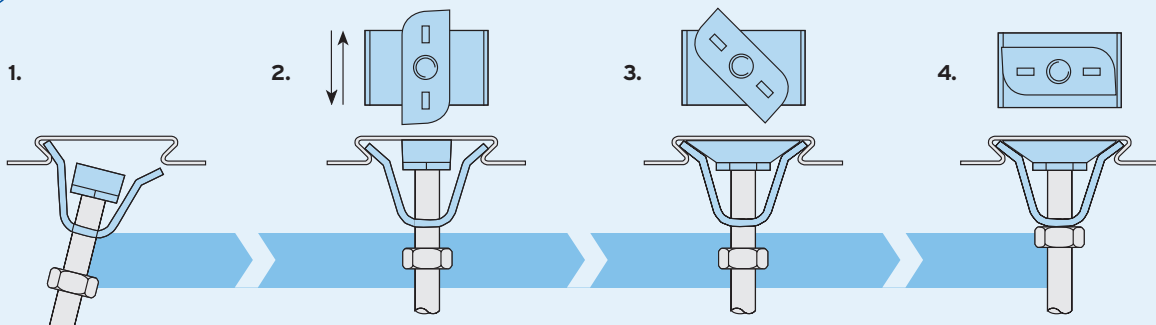
* Oversized washer supplied with MW06 and MW08. A washer is optional for MW10.

➤ For fire ratings refer to www.Lindapter.com



How to install...

▶ Watch the installation video at www.Lindapter.com



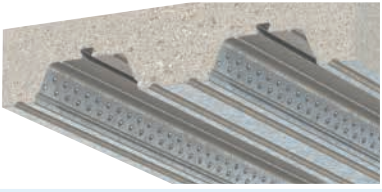


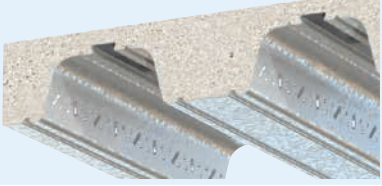



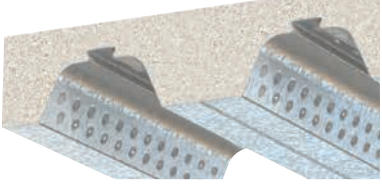

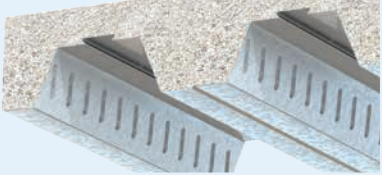


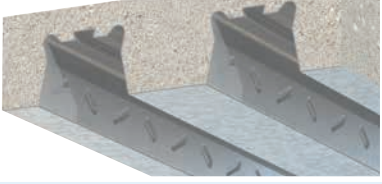


- 1) Pre-assemble the bracket and wedge (flat surface facing up) onto the threaded rod and insert one side of the bracket into the re-entrant channel of the decking.
- 2) Click the other leg of the bracket into position inside the decking and slide the assembly to the desired position along the length of the re-entrant channel.
- 3) Push and turn the wedge clockwise until it locks into the channel walls.
- 4) Tighten the hexagon nut beneath the assembly to the tightening torque specified in the table above.

- Install the decking fixings after the concrete has been poured and has reached full strength.
- If the decking profile is deformed or distorted, do not install the fixing. If in doubt, contact the Technical Support team for advice.
- Although the Type MW2 is similar in appearance to Type MF (p. 72), it should NOT be used in profiles manufactured by CMF®.

Compatible Profiles

Lindapter has developed an extensive range of CE Marked decking fixings to ensure optimum compatibility with all major decking profiles.

Lindapter Decking Fixing	Compatible Composite Decking Profile(s)
Type COM page 70  	Tata Steel ComFlor® 60, 80 and 95   Opening: 15mm (+/-1mm) 
Type TR60 page 71  	SMD® TR60+™ and TR80+™   
Type MF page 72  	CMF® MetFloor® 60 and MetFloor® 80   
Type MW2 Multiwedge 2 page 73  	Kingspan® Multideck MD60 and MD80   
Type AW Alphawedge page 74  	Richard Lees Decking Ribdeck E60   
Type AMD page 75 	AMDECK® AMDECK® 60 and AMDECK® 80   
Type SM page 76  	Sigmat SigDeck 100   
Type VN page 77  	Fits several profiles including: AMDECK® 54, R51+™, ComFlor® 51+, Holorib, Superib, Multideck MD50 and MetFloor® 55. 