


8460

Short Style Tee

Gr8LOK by **GRUVLOK**

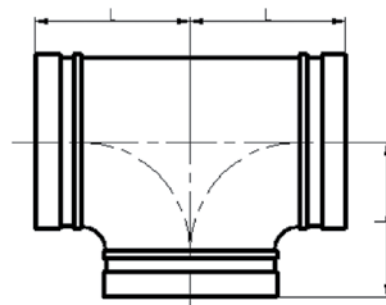

MATERIAL SPECIFICATIONS

CAST FITTINGS:

Ductile Iron conforming to ASTM A-536

FINISH:

Rust inhibiting paint – Color: Red (standard)

Hot Dipped Zinc Galvanized conforming to ASTM A-153 (optional)

For other coating requirements contact an Anvil Representative.

Nominal Size mm/in	Pipe O.D. mm/in	Max. Working Pressure MPa/PSI	Dimensions L mm/in
50 2	60.3 2.375	2.07 300	70.0 2.75
65 2½	73.0 2.875	2.07 300	76.0 3.00
65 2½	76.1 3.000	2.07 300	76.0 3.00
80 3	88.9 3.500	2.07 300	85.5 3.37
100 4	108.0 4.250	2.07 300	101.0 3.98
100 4	114.3 4.500	2.07 300	101.0 3.98
125 5	139.7 5.500	2.07 300	124.0 4.88
150 6	159.0 6.250	2.07 300	140.0 5.50
150 6	165.1 6.500	2.07 300	140.0 5.50
150 6	168.3 6.625	2.07 300	140.0 5.50
200 8	216.3 8.516	2.07 300	175.0 6.89
200 8	219.1 8.625	2.07 300	175.0 6.89